

Shower Faucet 6779-93-80CP

1.Ceramic valve with CERAMTEC ceramic disc / (Germany).


2.Handle can be moved up to 25° to adjust water flow from closed position, hot and cold water controlled by swinging handle for 45° both right and left sides.


3. The available distance between two centers of wall water-outlet is 122mm to 178mm. 4. With R 1/2 to water supply wall outlet.


5.Sand-casting material meets ISO CuZn40Pb Standard.

6.Handle material meets JIS 3771 Standard.

7.Brass with Chrome plated meets ASTM-SC2 standard; 5 years guarantee.

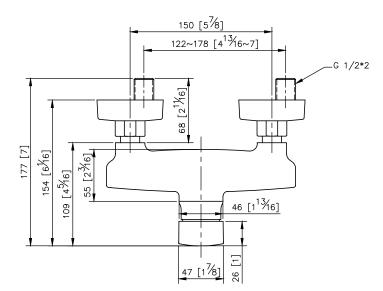





unit:mm[inch]