
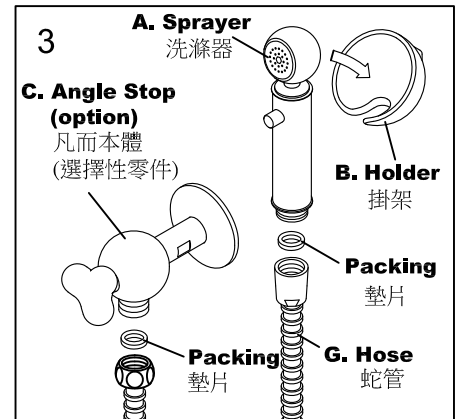
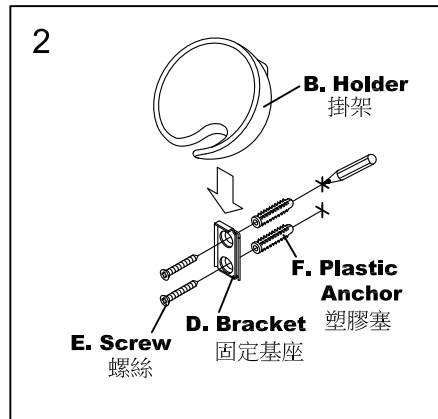


INSTALLATION INSTRUCTIONS

PATENT NUMBER:
專利號碼:
D136416

SPRAYER & ANGLE STOP

噴槍與凡而安裝說明

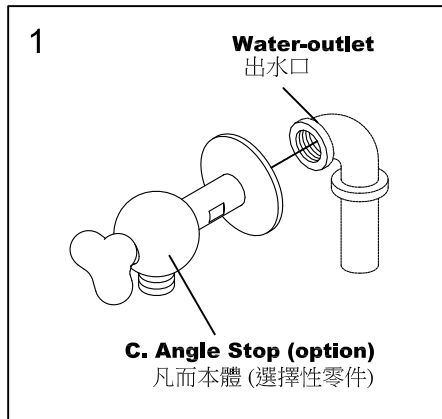

MAINTAINING

維護方式


- For cleaning the plastic meshes cover, please using **Hex Key 4mm** to remove the plastic meshes cover only as attached figure shown.

清潔噴灑頭塑膠蓋，如圖指示，使用 4mm 六角扳手開啟或裝置噴灑頭塑膠蓋。

CAUTION

注意事項

- Do not overtighten the plastic meshes cover when reassembly, or may damage the hex hole of plastic meshes cover.
重新裝置噴灑頭塑膠蓋時，請勿過度鎖緊，損壞塑膠六角內孔。
- Please run the water to clean the pipe before installation.
安裝洗滌器前須先將水中雜質排乾淨。
- Operate the Sprayer to make sure it could work smoothly after installation. Please try the Maintaining if it get stuck.
安裝後須先按壓洗滌器幾次讓出水順暢，如有雜質卡住參考維護方式。

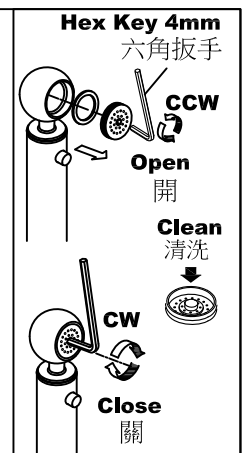

- Install **Angle Stop (option)** first, and then select a proper position for **Holder** as Fig.1 shown.
先安裝凡而本體 (選擇性零件)，再選定適當的高度準備安裝掛架，如圖 1 所示。
- Using **Bracket** as a template and mark the centers of **Bracket** mounting holes as Fig.2 shown.
以實際的固定基座作為定位板，並且以螺絲孔的中心點作記號，如圖 2 所示。
- Using a 6mm drill-bit, drill the holes in marked positions to a depth of 4cm, insert the **Plastic Anchor** flush with the wall, then attach **Bracket** with wall **Screw** on wall.
安裝於牆上時，使用 1/4 英寸鑽頭，鑽孔深度 4 公分，嵌入塑膠塞並與牆面齊平，用螺絲將固定基座鎖緊在牆上。
- Sliding and click-fixed the **Holder** onto the **Bracket**.
將掛架對準固定基座置入並且完成安裝。
- Connect **Hose** with **Angle Stop (option)** and **Sprayer** as Fig.3 shown.
將蛇管連接凡而本體 (選擇性零件) 及洗滌器，如圖 3 所示。

FIXING CONTENTS

組配件內容

